

MVDD-B – Protection for Battery loading & unloading

◆ Description ◆

MVDD-B used for Battery protection. As Bat. voltage exceeds set points (above **Set Hi** and under **Set Low**) the output relay will be OFF, relay will be ON when it is in between. The set points can be adjusted by internal pot' **HI** and **LO**.

3 models are available according to the Bat. voltage: **MVDD-B-12**, **MVDD-B-24**, **MVDD-B-48**.



◆ Specifications ◆

Table 1

Battery	Input voltage range according to the Battery models
12V	10 ÷ 16V
24V	22 ÷ 28V
48V	43 ÷ 53V

Output: relay N.O. 250 VAC/5A.

Hysteresis 2V (different between relay is ON and OFF)

Ambient Temp.: -20 + +55°C

Enclosure: plastic case UEGM 25

Size: W 25 x H 79 mm and depth D 93 mm.

Protection: IP-40 **Mounting:** DI N-rail


Connection: screw terminals (2.5mm 2 wires max)

◆ Panel description ◆

[1] LO - LED indicates Bat. (input) voltage under Set LO.

[2] HI - LED indicates Bat. voltage above Set HI.

[3] OUT -LED indicates relay ON.

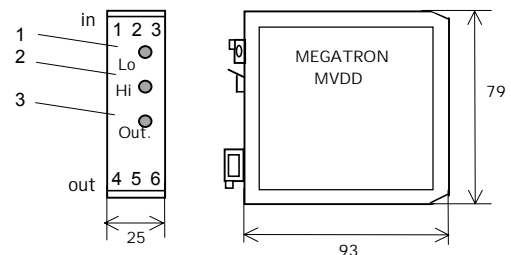

◆ Operation ◆

The output relay will be ON when Battery is in voltage range (see Table 1).


The output relay will be OFF in voltage deviation. When the voltage is return to Battery range the relay will activate after 0-10 sec delay. The delay can be adjusted by external pot'.

◆ Order ◆

Model	Voltage
MVDD-B	48V
	24V או
	12V או

MVDD B-S-1-05-E

◆ Connection ◆

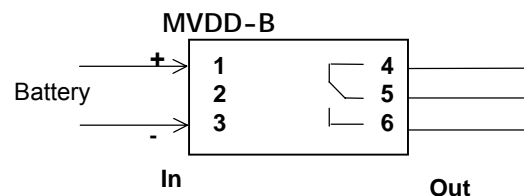

megatron electronics & controls ltd

Manufactures & Representatives for Control Equipment



מגטרון אלקטרוניקה ובקרה בע"מ

יצרנים ומפיצים של ציוד מכשור בקרה והתרעה

Web site: <http://www.megatron.co.il>

מיקרון 12 ת.ד. 25205 חיפה 31251

פקס. 04-8410705, רח"י 04-8410704